

Classic Model HT



Rugged.... Durable.... Harlan



The Harlan Classic Model HT is available with the latest tier rated Diesel, Gasoline and LPG engines.

Time tested, this durable model is designed for medium-duty cargo and baggage applications. This unit can also be utilized for push-back of small aircraft (with front hitch option package). Some options include complete cab assembly, heat/defrost, mirrors, beacons, variety of hitches, and suspension style seats.

Standard Features

F-N-R Shifter

Keyless anti-restart ignition switch

Two LED Headlights

Combination LED Tail/Stop lights and Back-up light

Keyless anti-restart ignition switch

LCD Display for Hours, Fuel level, Oil Pressure, Water temp (display varies on diesel and gas)

Electric Park Brake (electrically actuated on drum)


Standard Driver and Passenger seat

Retractable Seatbelts

Rear mount E-hitch



Specifications

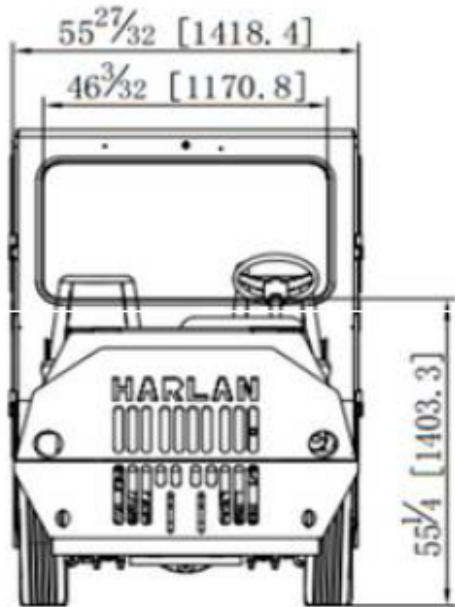

Length

112.25" (2852 mm)
w/ rear hitch: 120" (3048 mm)

Width

56" (1422 mm)

Height

61" (1549 mm)
w/ Cab 83.5" (2121 mm)

Wheel Base

68" (1727 mm)

Ground Clearance

6" (152 mm)

Drive Axle

Heavy-Duty Harlan—8200 lbs.
(3719 kg) Load Capacity

Steer Axle

Heavy-Duty Harlan with 1 1/8" Kingpin

Towing Coupler

E-Hitch w/1" pin
(other hitch options available)

Tires

Front: 6.50 x 10
Back: LT225/75R x16

Engine

Latest Model US/Euro Emission
Diesel, Gasoline, LPG

Transmission

Automatic Industrial

Electrical

12V System

Cooling

Liquid cooled radiator w/
Integrated transmission cooler

Steering System

Power Assist or Hydrostatic

Park Brake


Electrically actuated on drum

Service Brakes

Hydraulic/ Hydraulic, dual rear disk
with optional front brakes

Suspension

Front and Rear: Leaf Springs

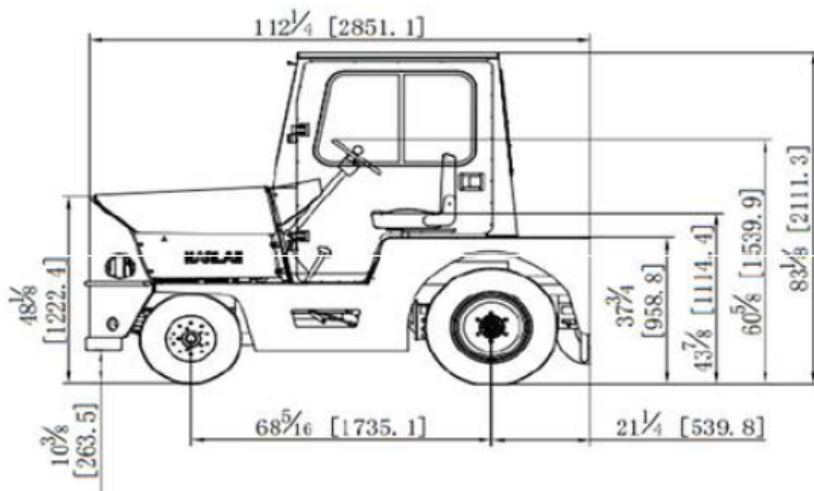

DRAW BAR PULL

HT30	HT40	HT50	HT60
3,000 lbs. (13.3kN)	4,000 lbs. (17.8N)	5,000 lbs. (22.2kN)	6,000 lbs. (26.7kN)



27 Stanley Rd. Kansas City KS, 66115 USA 913.342.5650

telephone 800.255.4262 toll-free US 913.321.5802 FAX