# TransCon Model HTSB



## Rugged.... Durable.... Harlan



**Standard Features** 

F-N-R Shifter

Keyless anti-restart ignition switch
Two LED Headlights

Combination LED Tail/Stop lights and Back-up light LCD Display for Hours, Fuel level, Oil Pressure, Water temp (display varies on diesel and gas)

Electric Park Brake (electrically actuated on drum)

Standard Driver and Passenger seat

Retractable Seatbelts

Rear mount E-hitch


The Harlan Model HTSB is available with the latest model US/Euro Emission compliant engines. This compact, shorter wheel-base, low profile design is robust with excellent all around visibility.

Designed for cargo and baggage applications, this unit can also be utilized for push-back of small aircraft (with front hitch option package). Some options include complete cab assembly, heat/defrost, mirrors, beacons, variety of hitches and suspension style seats





### Specifications

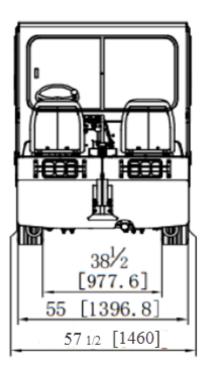

#### Length

105.75" (2687mm)

w/ rear hitch: 113" (2891 mm)

#### Width

57.5" (1460 mm)

#### Height

56.5" (1435 mm)

w/ Cab 81.5" (2070 mm)

#### **Wheel Base**

60 3/8" (1534 mm)

#### **Ground Clearance**

7.75" (196.8mm)

#### **Drive Axle**

Harlan Off-set—6000 lbs. (2722 kg) Load Capacity

#### Suspension

Front: Leaf Springs

Rear: Shocks and Coil Springs

#### **Towing Coupler**

E-Hitch with 1" pin (other hitch

options available)

#### Tires

Front: 165/R13

Back: LT225/75Rx16

#### Engine

Latest Model US/Euro Emission

Diesel, Gasoline LPG

#### Transmission

Automatic Industrial

#### Electrical

12V System

#### Cooling

Liquid cooled radiator with

Integrated transmission cooler

#### Steer Axle

Heavy-Duty Harlan Dual Shaft

#### Steering System

Hydrostatic

#### Park Brake

Electrically actuated on drum


#### Service Brakes

Hydraulic/ Hydraulic, Front and rear single disc brakes







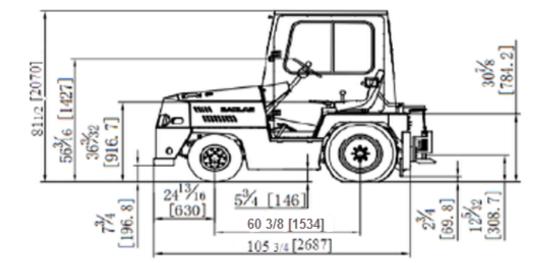

### DRAW BAR PULL

HTSB40 HTSB50 HTSB60
4,000 lbs. (17.8N) 5,000 lbs. (22.2kN) 6,000 lbs. (26.7kN)

