All Purpose Vehicle Model HTSBAPV



Rugged.... Durable.... Harlan



Standard Features

Cab w/metal doors, rearview mirror, dome
light F-N-R Shifter
High Efficiency AC Motor allows for longer
duty
AC Pump Motor
Fwd & Rvs Inching
Keyless anti-restart ignition switch Two LED
Headlights
Two LED Headlights
Combination LED Tail/Stop lights and Back-up
light 74"(1879mm) Diamond plate flat bed
with rails

LCD Dash Display
Electric Park Brake (electrically actuated on drum) Standard Driver and Passenger seat
Retractable Seatbelts
Rear Mount E-Hitch

The Lithium market is growing, and Harlan is growing with it as proven with the NEWLY DESIGNED Harlan Model HTSBELAPV Lithium-ion powered baggage/cargo tractor. Harlan has listened to our customers over the years, and we designed this model with their input in mind. Some options will include complete cab assembly, heat/defrost, mirrors, beacons, telemetry systems, tilt steering, and a variety of hitches and suspension-style seats. This comprehensive approach ensures that the Model HTSBELAPV meets both customer needs and industry requirements, reflecting Harlan's


commitment to delivering adaptable solutions in

response to industry trends.





Specifications



Length

177.25" (4502.8 mm)

w/ rear hitch: 182" (4623 mm)

Width

60" (1524 mm)

Height

56 3/8" (1442 mm)

w/ Cab 78 3/16" (1987 mm)

Wheel Base

105 15/16" (2691 mm)

Ground Clearance


6" (152 mm)

Drive Axle

Harlan Off-set—7000 lbs. (3175 kg) Load Capacity

Steer Axle

Heavy-Duty Harlan

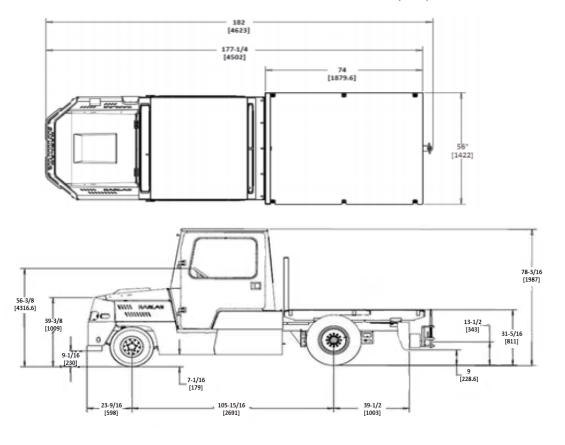

Towing Coupler

E-Hitch with 1" pin (other hitch options available)

Tires

Front: 165/R13

Rack: 1775/75Rx16

Engine

Latest Model US/Euro Emission

Diesel, Gasoline LPG

Transmission

Automatic Industrial

Electrical

12V System

Cooling

Liquid cooled radiator with

Integrated transmission cooler

Steering System

Hydrostatic

Service Brakes

Hydraulic/ Hydraulic, Front and rear single disc brakes

Suspension

Front: Leaf Springs

Rear: Shocks and Coil Springs

Park Brake

Mechanical drum, level

activated

Bed Length

74" (1879.6mm)

Bed Width

56" (1422 mm)







